



Datasheet 202605

EMI/RFI filter with high attenuation for industrial and residential applications



FIN1351.(006 - 016).M

FEATURES

- Rated current from 6 to 16A
- Very low leakage current
- DIN rail mounting

MARKETS

- Conveyors
- Testing equipment
- High tech machinery
- Automated machinery

APPROVALS:



BENEFITS

- 5 Year warranty
- Suitable for medical applications
- Very compact design
- Protects equipment


ORDERING CODE

FIN1351 .016 .M
Model Current (A) Connection
M = Terminal block

ATTENUATION INDICATOR

High	Very High	Excellent

ELECTRIC DIAGRAM

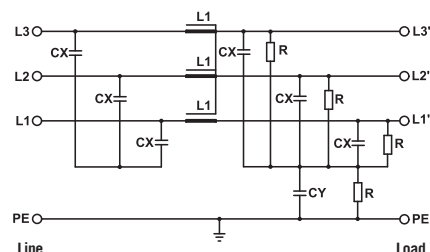

TECHNICAL SPECIFICATIONS

Nominal voltage	0 - 480 Vac
Frequency	50/60 Hz
Rated current	6 - 16 A
Potential test voltage phase to phase	2200 Vdc (2 sec.)
Potential test voltage phase to ground	2900 Vdc (2 sec.)
Leakage current normal conditions	< 3 mA *
Leakage current worst conditions	< 5 mA
IP Protection	IP20
Overload capability	4 x Rated current (Switch ON) 2 x In 10 seconds 1.5 In for 10 minutes
Climatic class	-40 to 85°C
MTBF at 40°C	250,000 Hours

* Voltage 230 Vac phase to ground 50 Hz / 40°C


ELECTRICAL CHARACTERISTICS

FIN1351	Rated Current 40°C	Rated Current 50°C	Power Loss (W)
.006.M	6	5	6
.010.M	10	8	8
.016.M	16	14	10

CONNECTIONS

LINE			PE
Solid Cable (mm ²)	Stranded Cable (mm ²)	Terminal Block Torque (Nm)	Torque (Nm)
0.2 - 4	0.2 - 4	0.5	0.5
0.2 - 4	0.2 - 4	0.5	0.5
0.2 - 4	0.2 - 4	0.5	0.5


TYPICAL ATTENUATION

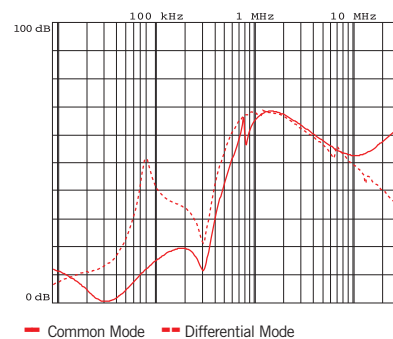

MECHANICAL DIMENSIONS mm

FIN1351	A	B	H	N	Weight Kg.	Case
.006.M	65	85	39	11	0.32	1
.010.M	65	85	39	11	0.32	1
.016.M	65	85	39	11	0.32	1

CASE 1



ASSEMBLY CONNECTION "M"

